






# FOX (95mm) Foam Filled Flat Lath Section

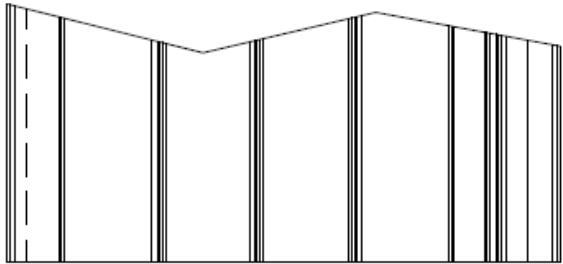

FRONT FACE

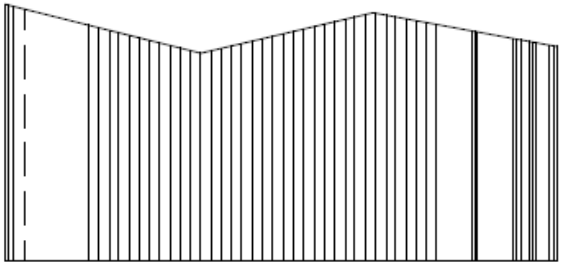

REAR FACE

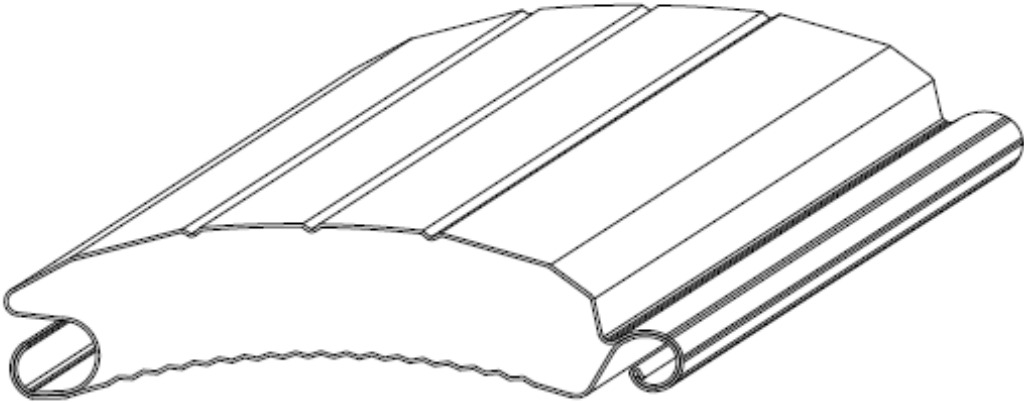


Isofoam RM 6483W

**Description**  
 Isofoam RM 6483W is the resin component of a two part, MDI based system for producing rigid foam by "standard lamination techniques". It is specifically formulated to produce rigid polyurethane (PUR) foam for use in high or low pressure machines.

**Typical Physical Properties**

Properties	Test Method	Units	Value
Density (overall)	BS4370	Kgm <sup>-3</sup>	90.6
Density (core)	BS4370	Kgm <sup>-3</sup>	80.4
Thermal Conductivity	Anacon ASTM C-518	W/m.K	0.025
Closed Cell Content	ASTM D-6226	%	99.5

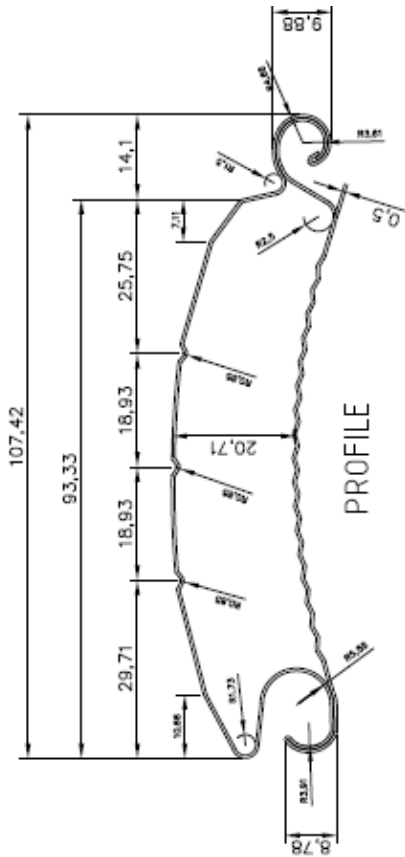

PROFILE

Fox Industrial Doors Ltd  
 Head Office Address:  
 Chapel House  
 Queen Street  
 Stourton  
 Leeds  
 LS10 1SL  
 United Kingdom  
 Landline: 0113 320 1000  
 Mobile: 0796 801 4668

